

Release Notes for DrayTek Vigor 2767 series (UK/Ireland)

Firmware Version	5.3.5 (Formal Release)
Release Type	Initial Release
Build Date	30 th October 2025
Release Date	9 th December 2025
Web Version	r4280.4edd72f7
Core Version	r675
Applicable Models	Vigor 2767, Vigor 2767ax
DSL Modem Code	5.16.19.0
Locale	UK & Ireland Only

First Firmware Release for this model

New Features

(None)

Improvements

(None)


Firmware File Types

The ZIP file contains the firmware with two different file extensions, .SFW and .RST. The firmware is identical, but the RST file contains factory default settings. If you install the SFW file, your router will retain all existing settings. If you use the RST file, all settings will be wiped from your router.

Upgrade Instructions

It is recommended that you take a configuration backup prior to upgrading the firmware. This can be done from the router's system maintenance menu.

To upgrade firmware, select '*System Upgrade*' from the router's system maintenance menu and select the correct file. Ensure that you select the .SFW file unless you want to wipe out your router's settings back to factory default.

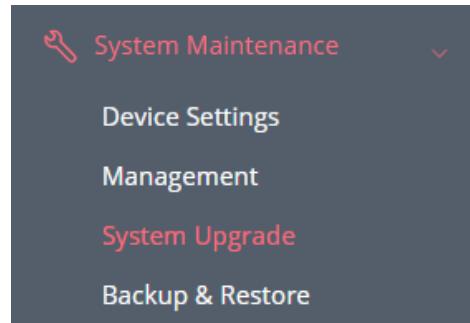

Automatic Firmware Upgrade (DrayOS 5)

DrayOS 5 introduces an optional automatic firmware upgrade feature (disabled by default). When enabled, the system automatically detects, downloads, and installs the latest firmware release.

Manual Upgrade

If you cannot access the router's menu, you can put the router into 'TFTP' mode by holding the RESET whilst turning the unit on and then use the Firmware Utility. That will enable TFTP mode. TFTP mode is indicated by LEDs flashing. This mode will also be automatically enabled by the router if there is a firmware/settings abnormality. Upgrading from the web interface is easier and recommended – this manual mode is only needed if the web interface is inaccessible.

[END OF FILE]