

## **Release Notes for DrayTek VigorAP 805 (UK/Ireland)**

Firmware Version	5.0.3 (Formal Release)
Release Type	<b>Initial Release</b>
Build Date	2 <sup>nd</sup> December 2024
Release Date	28 <sup>th</sup> January 2025
Web Version	r4047.59bc8092
Core Version	r640
Applicable Models	VigorAP 805
Locale	UK Only

**First Firmware Release for this model**

## Firmware File Types


The file name of the firmware controls which upgrade type is performed.

If the file name is unchanged (e.g. xxxx.**sfw**) then the upgrade will just upgrade the firmware, whereas renaming the firmware to a **.rst** extension will wipe all settings back to factory defaults when upgrading the firmware.

## Upgrade Instructions

It is recommended that you take a configuration backup prior to upgrading the firmware. This can be done from the AP's system maintenance menu.

To upgrade firmware, select '*firmware*' from the AP's system maintenance menu and select the correct file. The access point will perform the upgrade and automatically reboot once this completes.

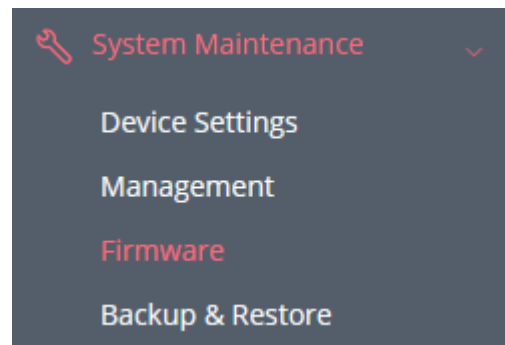

## Manual Upgrade

If you cannot access the AP's menu, you can put the AP into 'TFTP' mode by holding the FACTORY RESET button whilst turning the unit on and then use the Firmware Utility. That will enable TFTP mode. TFTP mode is indicated by LED flashing. This mode will also be automatically enabled by the access point if there is a firmware/settings abnormality. Upgrading from the web interface is easier.

---

**[END OF FILE]**